

# N536HF C-172R

Version 3.0 Updated 04/02/2025

## Cabin

Pitot Tube	Remove
Flashing Beacon	On
Ignition Switch	Off
Avionics	Off
Master Switch	On
Flaps	Extend / Full
Exterior Lights	On / Check / Off
Fuel Quantity ( L & R)	Check
Oil Pressure	Check
Ammeter	Check
Low Vacuum	Check
Pitot Heat	Check
Master Switch	Off
Right Fuel Quantity	Check
Engine Oil Quantity	Check
Left Fuel Quantity	Check
Documents	Check
POH	Available
Supplements	Available
Parking Brake	Set
Control Wheel Lock	Remove
Flight Controls	Free/Correct
Fire Extinguisher (Not Required)	Check
Fuel Selector	Check / Both
Fuel Shutoff	On (in fully)
Elevator Trim	Check / Takeoff
Mixture	Idle Cut-Off
Throttle	Closed
Alternate Static Source	Check / Off

## Aft Fuselage & Empennage

Cargo	Secured
Baggage Door	Secured
Horizontal Stabilizer	Inspect
Elevator & Trim Tab	Inspect
Vertical Stabilizer	Inspect
Static Wicks	Inspect
Tie-Down	Remove
Antennas	Inspect

## Right Wing

Flap / Aileron	Inspect
Static Wicks	Inspect
Wing Tip / Lights	Inspect
Leading Edge	Inspect
Landing / Taxi Light	Inspect
Tie-Down / Chocks	Remove
Main Gear	Inspect
Right Fuel Sump	Drain
Fuel Quantity	Verify
<b>Fuel Cap / Vent</b>	<b>Check / Secure</b>
Overhead Cabin Vents	Clear

## Forward Fuselage

Cabin Air Inlet	Clear
Oil Quantity	Verify
Engine Cowling	Inspect
Exhaust Stack	Inspect
Reservoir / Strainer	Drain
Engine Cooling Inlet	Check
Propeller	Inspect
Induction Inlet / Filter	Inspect
Alternator Belt	Inspect
Nose Gear	Inspect
Tie-Down	Remove
Static Source Opening	Inspect
External Power	Closed / Latched

## Left Wing

Left Fuel Sump	Drain
Fuel Quantity	Verify
<b>Fuel Cap / Vent</b>	<b>Check / Secure</b>
Leading Edge	Inspect
Overhead Cabin Vents	Clear
Pitot Tube	Inspect
Fuel Vent	Inspect
Stall-Warning Opening	Inspect
Landing / Taxi Light	Inspect
Wing Tip / Lights	Inspect
Static Wicks	Inspect
Flap / Aileron	Inspect
Tie-Down / Chocks	Remove
Main Gear	Inspect
360° Walk-Around	Perform

## Ramp Out

**NOTE: AVIONICS IS ALWAYS OFF PRIOR TO MASTER GOING OFF**

Master Switch	On
Avionics Switch	On
ATIS / Clearance	Obtain
Avionics Switch	Off
Master Switch	Off

## Passenger Briefing

Seatbelts / Air Vents
Air Sickness / Fire Extinguisher
Exit Use / Survival Kit
Traffic Watch

## Crew Briefing

Airport Diagram / ATIS
Runway in Use / Departure Clearance
V <sub>a</sub> / PIC, PF, PM
Positive Exchange of Flight Controls
Sterile Cockpit / Safe Attitude

## Before Start

Fuel Selector	Both
Fuel Shutoff	On (In Fully)
<b>Mixture Control</b>	<b>Idle Cut-Off</b>
Throttle	Open 1/4"
Navigation Lights	As Required
Circuit Breakers	In
Parking Brake	Set
Seatbelts	On

# EB FLIGHT TRAINING LLC



1575 AVIATION CENTER PKWY  
STE 518  
DAYTONA BEACH, FL 32114

Email: [contact@ebflight.com](mailto:contact@ebflight.com)  
Phone: (386) 388-4783

### Engine Start

Master Switch	On
Prime	As Required
Prop Area	Clear
Brakes	Hold
Starter	Engage
Mixture	Full Rich
Throttle	1000 RPM
Engine Gauges	Check

Vacuum Pressure	Check
Ammeter	Check

<b>Mixture</b>	<b>Lean</b>
----------------	-------------

### Before Taxi

Avionics Switch	On
Radios	Set
Instruments	Set
Transponder	Check / On
Annunciators	Test
Flaps	Up
Parking Brake	Release

### Run-Up

Parking Brake	Set
Flight Controls	Free / Correct
Windows	Close
Fuel Selector	Both
Mixture	Full rich
Throttle	1800 RPM
Magnetos [175 / 50]	Check
Engine Gauges	Check
Vacuum Gauge [5.0"±0.1]	Check
Throttle	Idle
Mixture	Lean
Throttle	1000 RPM
Parking brake	Release

### Departure Briefing

Runway Available / Required
Airspeeds / Crosswind / Gust
Terrain / Obstacles / Wake Turbulence
Noise Abatement / Departure Plan
Sterile Cockpit / Emergency Procedure

### Departure

Seatbelts	On
Cabin Doors	Closed / Locked
Elevator Trim	Set
Flaps	Set / Verify
Heading Indicator	Set
Flight Instruments	Set
Autopilot (If Installed)	Off

### Before Takeoff

Traffic	Check
Windows	Close / Locked
Fuel Selector	Both
Mixture	Full Rich
Lights	On
Pitot Heat	As Required

### Climb

(Complete Prior to 1,000 AGL)

Flaps	Up
Climb Power	Set
Mixture	As Required
Engine Instruments	Check

### Cruise

Cruise Power	Set
Elevator Trim	Set
Mixture	Lean

Heading Indicator	Set
Engine Instruments	Monitor
Fuel Quantity	Monitor
Lights	On

### Arrival Briefing

Arrival Plan / TPA
Runway Distance Available / Required
Approach speed / Crosswind
Terrain / Obstacles
Wake Turbulence / Wind Shear
Noise Abatement / Sterile Cockpit

### Arrival

Seatbelts	On
Fuel Selector	Both
Lights	On
Flight Instruments	Set

### Before Landing

**NOTE: TO BE COMPLETED AT 500' AGL**

Fuel Selector	Both
Mixture	Full Rich
Autopilot (If Installed)	Off

### After Landing

Lights	As Required
Pitot Heat	Off
<b>Mixture</b>	<b>Lean</b>
Flaps	Up
Elevator Trim	Takeoff

### Shutdown

**NOTE: AVIONICS IS ALWAYS OFF PRIOR TO MASTER GOING OFF**

Parking Brake	Set
Avionics	Off
Throttle	1000 RPM
Mixture	Idle Cut-Off
Ignition Switch	Off
Navigation / Taxi Lights	Off
Master	Off

### Secure

Lights / Elec. Switches	Off
Flaps	Up
Control Wheel Lock	Install
Fuel Selector	Left
Pitot Tube Cover	Install
Gust Locks	Install (If Required)
Tie-Downs	Secure
Main Wheels	Chock
<b>Parking Brake</b>	<b>Release</b>
<b>Trash</b>	<b>Remove</b>
Windows / Doors	Close / Lock

**NOTE: STUDENTS AND RENTERS WILL BE CHARGED AN AIRPLANE CLEANING FEE FOR TRASH LEFT IN AIRPLANES.**

### Lean Procedure

Throttle	1200RPM
Mixture Control	Lean to Drop in RPM
Mixture Control	Return to Max RPM
Throttle	1000RPM

### Engine Failure During Takeoff Roll

Directional Control	Maintain
Throttle	Close Immediately
Brake	As Required
<u>Insufficient Rwy for Stop:</u>	
Flaps	Up
Mixture	Idle Cut-Off
Ignition	Off
Master	Off

### Engine Failure Immediately After Takeoff

Airspeed	70 UP/65 DOWN
Throttle	Close Immediately
Fuel Selector	Off
Mixture	Idle Cut-Off
Flaps	As Required
Ignition	Off
Master	Off
Doors	Unlatch
Land	Straight Ahead

### Spin Recovery

Throttle	Close
Ailerons	Neutral
Rudder	Opposite Direction of Spin
Control Wheel	Full Forward
<u>When Rotation Stops:</u>	
Rudder	Neutralize
Control Wheel	Apply Back Pressure

### Static Source Blockage

Alternate Static Source	On
Cabin Heat / Air	On
Vents	Closed
Airspeed	Use Calibration Table(Sec.5)

### Engine Failure During Flight

Airspeed	65
Flaps	Up
Landing Site	Select
Fuel Selector	Both
Fuel Shutoff Valve	On (In Fully)
Mixture	Rich
Aux Fuel Pump	On
Ignition	Both (Start)

#### If Engine Fails to Start:

Airspeed	65
Fuel Selector	Both
Fuel Shutoff Valve	On (In Fully)
Mixture	Idle Cut-Off
Throttle	Full forward
Aux Fuel Pump	Off
Ignition	Both (Start)

#### If Engine Fails to Start:

Transponder	7700
Radio(121.5)	Mayday

### Proceed with Emergency Landing without Engine Power.

### Emergency Landing Without Engine Power

Passenger Seats	Upright
Seatbelts	On
Fuel Shutoff Valve	Off (Out Fully)
Mixture Control	Idle Cut-Off
Flaps	Full Recommended
ELT Switch	On
Ignition Switch	Off
Master Switch	Off (Landing Assured)
Cabin Doors	Unlatch
Touchdown	Slightly Tail-Low
Brakes	Apply Heavily

### Engine Fire During Start

Starter	Continue to Engage
<u>If Engine Starts:</u>	
Throttle	1800 RPM (Few Min.)
Mixture	Idle Cut-Off
Engine	Inspect

#### If Engine Fails to Start:

Starter	Continue to Engage
Fuel Selector	Off
Mixture	Idle Cut-Off
Throttle	Full Forward
Fuel Pump	Off
Master	Off
Ignition	Off
Parking Brake	Release
Fire Extinguisher	Obtain
Airplane	Evacuate

### Engine Fire in Flight

Mixture	Idle Cut-Off
Fuel Selector	Off
Master	Off
Cabin Vents	Open (As Needed)
Cabin Air/Heat	Off
Airspeed	100+ KIAS / Extinguish

### Proceed with Emergency Landing without Engine Power.

### Cabin Fire in Flight

Master	Off
Cabin Vents/Air/Heat	Off
Fire Extinguisher	Obtain/Discharge

#### Once Fire is Extinguished:

Cabin Vents/Air/Heat	Open
Airport	Land

### Electrical Fire in Flight

Master	Off
Avionics	Off
Electrical Switches	Off
Vents/Air/Heat	Closed
Fire Extinguisher	Obtain/Discharge

#### Once Fire is Extinguished:

Cabin vents/Air/Heat	Open
<u>If Electrical Power Necessary:</u>	
Circuit Breakers	Check
Master	On
Avionics	On

### Wing Fire in Flight

Landing/Taxi Lights	Off
Nav Lights	Off
Strobe	Off
Pitot Heat	Off
Sideslip	(Step on Fire, Fly Away)

### Carbon Monoxide Level High

Cabin Heat	Off
Cabin Air	On
Cabin Vents	Open
Windows	Open
Airport	Land

### Inadvertent Icing Encounter

Pitot Heat	On
Altitude or Direction	Change
Cabin Heat	On
Defroster Outlets	Open
Cabin Air	Open/Max
Airport	Plan Landing
Flaps	Up
Approach Speed	65-70

### Oil Pressure Low

#### If Oil Temp. Normal:

Airport	Land
<u>If Oil Temp. Rising:</u>	
Power	Reduce
Landing Field	Select
Power	Minimum Use

### Rough Engine Operation / Loss of Power

#### Spark Plug Fouling

Ignition	Check
Mixture	Adjust
<u>If Roughness/Power Loss Persists:</u>	
Ignition	As Required
Airport	Land

#### Ignition Malfunction:

Ignition	Check both, R, L
Power	Adjust
Mixture	Enrich
<u>If Roughness/Power Less Persists:</u>	
Ignition	As Required
Airport	Land

### High Volts

Alternator Switch	Off
<u>Electrical Load Reduce:</u>	
Avionics	Off (Unless Req.)
Pitot Heat	Off
Lights	Off
Airport	Land

### Low Voltage at High RPM

Alternator	Off
Alternator Circuit Breaker	Reset
Master	On
Low volts	Check Off

#### If Low Volts Continues:

Alternator	Off
<u>Electrical Load Reduce:</u>	
Avionics	Off (Unless Req.)
Pitot heat	Off
Lights	Off
Airport	Land

### Landing with Flat Main Tire

Approach	Normal
Flaps	Full
Touchdown	Good Tire First
Directional Control	Maintain

### Landing with Flat Nose Tire

Approach	Normal
Flaps	Full
Touchdown	Main Gear
Directional Control	Maintain

### Landing Without Elevator Control

Flaps	20
Airspeed	65
Trim	Horizontal Flight
<i>*Control Glide with Power*</i>	
Landing Flare	Trim Nose Up
Throttle	Close

### Ditching

Radio	Mayday
Heavy Objects	Secure/Jettison
Passenger Setbacks	Upright
Seatbelts	On
Flaps	20-Full
Power	300fpm Descent@55

#### Approach:

High Wind, Heavy Seas:	Into wind
Light Wind, Heavy Swells:	Parallel Swell

Cabin Doors	Unlatch
ELT	On
Touchdown	Level
Face	Cushion at Touchdown
Airplane	Evacuate

### Flooded Start

Fuel Pump	Off
Mixture	Idle Cut-Off
Throttle	Full Forward
Ignition	Start
<u>When Engine Starts:</u>	
Mixture	Full Rich
Throttle	1000 RPM

### Fouled Spark Plug Burn Off Procedure


**NOTE: WHEN LEANING, YOU ARE LEANING TO THE DROP IN RPM. DO NOT INCREASE MIXTURE AFTER DROP**

**TRY CLEARING THE PLUGS BY RUNNING YOUR ENGINE UP TO 2000 RPM ON BOTH MAGS LEANING TO ABOUT 50 RPM LEAN OF PEAK (CONTINUE TO LEAN UNTIL YOU MAXIMIZE RPM, THEN LEAN FURTHER UNTIL YOU LOSE ABOUT 50 RPM). LET THE ENGINE RUN FOR ABOUT 30 SECONDS AND THEN TRY ANOTHER NORMAL RUN-UP (AT THE NORMAL RUN-UP RPM) TO SEE IF THE PROBLEM CLEARED UP. IF NOT, TRY THE SAME PROCEDURE AGAIN.**

**IF AFTER THE 3RD TRY IT DOESN'T CLEAR UP, GET SOME MAINTENANCE HELP TO CORRECT THE PROBLEM BEFORE FLYING THE AIRPLANE.**

**SPARK PLUG CARBON BUILD UP CAN BE A RESULT OF RUNNING THE MIXTURE TOO RICH. TO AVOID THIS, WAIT UNTIL LAST MINUTE TO APPLY FULL MIXTURE FOR TAKEOFF/LANDING. LEAN FOR TAXI. RUNNING THE ENGINE HOT CAN ASSIST WITH BURNING OFF CARBON DEPOSITS.**

Throttle	2000 RPM
Mixture Control	Lean of Peak EGT
Time	45-60 Seconds
Throttle	1000 RPM
Run-Up Checklist	Complete

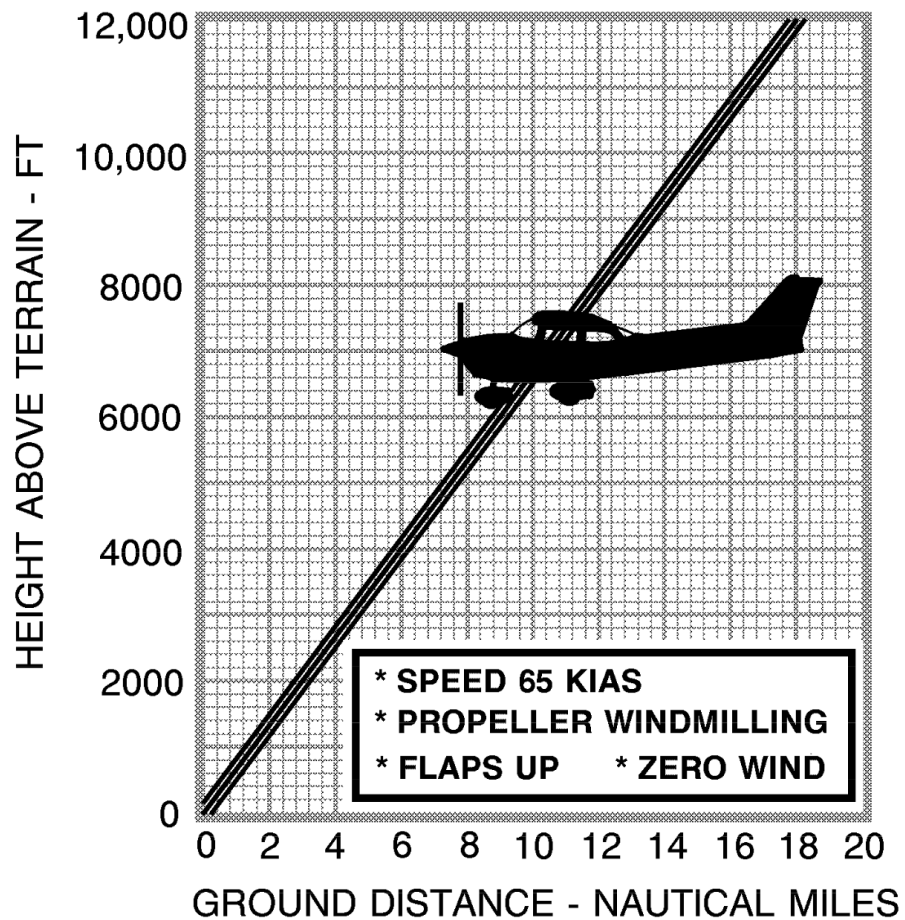

## AIRSPED LIMITATIONS

Airspeed limitations and their operational significance are shown in Figure 2-1. Maneuvering speeds shown apply to normal category operations. The utility category maneuvering speed is 92 KIAS at 2100 pounds.

SYMBOL	SPEED	KCAS	KIAS	REMARKS
V <sub>NE</sub>	Never Exceed Speed	160	163	Do not exceed this speed in any operation.
V <sub>NO</sub>	Maximum Structural Cruising Speed	126	129	Do not exceed this speed except in smooth air, and then only with caution.
V <sub>A</sub>	Maneuvering Speed: 2450 Pounds 2000 Pounds 1600 Pounds	97 91 82	99 92 82	Do not make full or abrupt control movements above this speed.
V <sub>FE</sub>	Maximum Flap Extended Speed: 10° Flaps 10° to 30° Flaps	108 84	110 85	Do not exceed this speed with flaps down.
----	Maximum Window Open Speed	160	163	Do not exceed this speed with windows open.

**SHORT FIELD TAKEOFF DISTANCE  
AT 2450 POUNDS**

CONDITIONS:

Flaps 10°  
Full Throttle Prior to Brake Release  
Paved, level, dry runway  
Zero Wind  
Lift Off: 51 KIAS  
Speed at 50 Ft: 57 KIAS

Press Alt In Feet	0°C		10°C		20°C		30°C		40°C	
	Grnd Roll Ft	Total Ft To Clear 50 Ft Obst	Grnd Roll Ft	Total Ft To Clear 50 Ft Obst	Grnd Roll Ft	Total Ft To Clear 50 Ft Obst	Grnd Roll Ft	Total Ft To Clear 50 Ft Obst	Grnd Roll Ft	Total Ft To Clear 50 Ft Obst
S. L.	845	1510	910	1625	980	1745	1055	1875	1135	2015
1000	925	1660	1000	1790	1075	1925	1160	2070	1245	2220
2000	1015	1830	1095	1970	1185	2125	1275	2290	1365	2455
3000	1115	2020	1205	2185	1305	2360	1400	2540	1505	2730
4000	1230	2245	1330	2430	1435	2630	1545	2830	1655	3045
5000	1355	2500	1470	2715	1585	2945	1705	3175	1830	3430
6000	1500	2805	1625	3060	1750	3315	1880	3590	2020	3895
7000	1660	3170	1795	3470	1935	3770	2085	4105	2240	4485
8000	1840	3620	1995	3975	2150	4345	2315	4775	---	---

NOTES:

1. Short field technique as specified in Section 4.
2. Prior to takeoff from fields above 3000 feet elevation, the mixture should be leaned to give maximum RPM in a full throttle, static runup.
3. Decrease distances 10% for each 9 knots headwind. For operation with tail winds up to 10 knots, increase distances by 10% for each 2 knots.
4. For operation on dry, grass runway, increase distances by 15% of the "ground roll" figure.
5. Where distance value has been deleted, climb performance is minimal.

Figure 5-5. Short Field Takeoff Distance

**TIME, FUEL AND DISTANCE TO CLIMB  
AT 2450 POUNDS**

CONDITIONS:

Flaps Up  
Full Throttle  
Standard Temperature

PRESS ALT FT	TEMP °C	CLIMB SPEED KIAS	RATE OF CLIMB FPM	FROM SEA LEVEL		
				TIME IN MIN	FUEL USED GAL	DIST NM
S.L.	15	79	720	0	0.0	0
1000	13	78	670	1	0.4	2
2000	11	77	625	3	0.7	4
3000	9	76	575	5	1.2	6
4000	7	76	560	6	1.5	8
5000	5	75	515	8	1.8	11
6000	3	74	465	10	2.1	14
7000	1	73	415	13	2.5	17
8000	-1	72	365	15	3.0	21
9000	-3	72	315	18	3.4	25
10,000	-5	71	270	22	4.0	29
11,000	-7	70	220	26	4.6	35
12,000	-9	69	170	31	5.4	43

NOTES:

1. Add 1.1 gallons of fuel for engine start, taxi and takeoff allowance.
2. Mixture leaned above 3000 feet for maximum RPM.
3. Increase time, fuel and distance by 10% for each 10°C above standard temperature.
4. Distances shown are based on zero wind.

Figure 5-7. Time, Fuel and Distance to Climb

**CRUISE PERFORMANCE**

CONDITIONS:  
2450 Pounds  
Recommended Lean Mixture At All Altitudes (Refer to Section 4, Cruise)

PRESS ALT FT	RPM	20°C BELOW STANDARD TEMP			STANDARD TEMPERATURE			20°C ABOVE STANDARD TEMP		
		% BHP	KTAS	GPH	% BHP	KTAS	GPH	% BHP	KTAS	GPH
2000	2250	---	---	---	79	115	9.0	74	114	8.5
	2200	79	112	9.1	74	112	8.5	70	111	8.0
	2100	69	107	7.9	65	106	7.5	62	105	7.1
	2000	61	101	7.0	58	99	6.6	55	97	6.4
	1900	54	94	6.2	51	91	5.9	50	89	5.8
4000	2300	--	---	---	79	117	9.1	75	117	8.6
	2250	80	115	9.2	75	114	8.6	70	114	8.1
	2200	75	112	8.6	70	111	8.1	66	110	7.6
	2100	66	106	7.6	62	105	7.1	59	103	6.8
	2000	58	100	6.7	55	98	6.4	53	95	6.2
	1900	52	92	6.0	50	90	5.8	49	87	5.6
6000	2350	--	---	---	80	120	9.2	75	119	8.6
	2300	80	117	9.2	75	117	8.6	71	116	8.1
	2250	76	115	8.7	71	114	8.1	67	113	7.7
	2200	71	112	8.1	67	111	7.7	64	109	7.3
	2100	63	105	7.2	60	104	6.9	57	101	6.6
	2000	56	98	6.4	53	96	6.2	52	93	6.0

NOTE:

1. Cruise speeds are shown for an airplane equipped with speed fairings. Without speed fairings, decrease speeds shown by 2 knots.

Figure 5-8. Cruise Performance (Sheet 1 of 2)

**SHORT FIELD LANDING DISTANCE  
AT 2450 POUNDS**

CONDITIONS:

Flaps 30°  
Power Off  
Maximum Braking  
Paved, level, dry runway  
Zero Wind  
Speed at 50 Ft: 62 KIAS

Press Alt In Feet	0°C		10°C		20°C		30°C		40°C	
	Grnd Roll Ft	Total Ft To Clear 50 Ft Obst	Grnd Roll Ft	Total Ft To Clear 50 Ft Obst	Grnd Roll Ft	Total Ft To Clear 50 Ft Obst	Grnd Roll Ft	Total Ft To Clear 50 Ft Obst	Grnd Roll Ft	Total Ft To Clear 50 Ft Obst
S. L.	525	1250	540	1280	560	1310	580	1340	600	1370
1000	545	1280	560	1310	580	1345	600	1375	620	1405
2000	565	1310	585	1345	605	1375	625	1410	645	1440
3000	585	1345	605	1380	625	1415	650	1445	670	1480
4000	605	1380	630	1415	650	1450	670	1485	695	1520
5000	630	1415	650	1455	675	1490	700	1525	720	1560
6000	655	1455	675	1490	700	1530	725	1565	750	1605
7000	680	1495	705	1535	730	1570	755	1610	775	1650
8000	705	1535	730	1575	755	1615	780	1655	810	1695

NOTES:

1. Short field technique as specified in Section 4.
2. Decrease distances 10% for each 9 knots headwind. For operation with tail winds up to 10 knots, increase distances by 10% for each 2 knots.
3. For operation on dry, grass runway, increase distances by 45% of the "ground roll" figure.
4. If landing with flaps up, increase the approach speed by 7 KIAS and allow for 35% longer distances.

Figure 5-11. Short Field Landing Distance